




HSS (8% Cobalt) Drill Bit

Product Catalog



HSS (8% Cobalt) Drill Bit

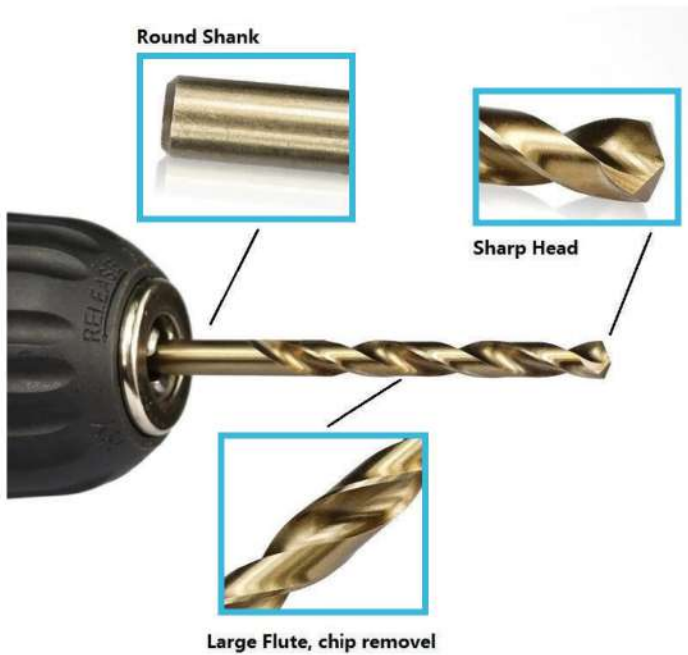

Description

Scarb® HSS Cobalt Drill Bits are finely engineered with precise grinding, elevating their performance to the highest level. By incorporating 8% cobalt into the High-Speed Steel, these bits showcase impressive durability, increased strength, and heightened resistance to wear, ensuring they stay sharp for a long time. Their standout feature is the Split Point cutting head, allowing for swift and secure material grip upon contact, leading to superior precision, accuracy, and notably faster drilling speeds. These drill bits are available in straight shank, taper shank, and a reduced shank size of 1/2" parallel, offering versatility and easy integration into various drilling setups. Professionals and enthusiasts will appreciate the exceptional performance and longevity of Scarb® HSS Cobalt Drill Bits for a range of drilling needs.

Features

- Drilling in stainless steel.
- High temperature resistance.
- Accuracy when starting drilling.
- Long life




Applications

- Stainless Steel
- Alloy Steel
- Non-Alloy Steel
- Cast Iron
- Brass
- Copper
- Aluminium
- Plastic





HSS (8% Cobalt) Drill Bit

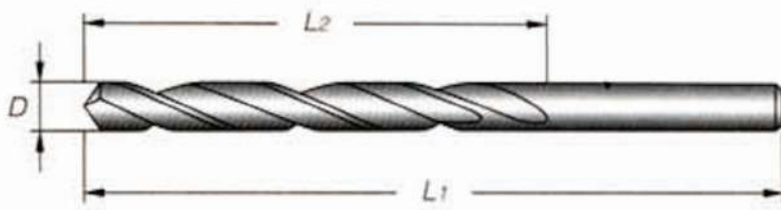

Technical Data (Straight Shank)

(All units in mm)


Art No.	D	L1	L2
D300005	0.50	22	6
D300015	1.00	34	12
D300015	1.50	43	20
D30002	2.00	49	24
D300025	2.50	57	30
D30003	3.00	61	33
D300035	3.50	70	39
D30004	4.00	75	43
D300042	4.20	75	43
D300045	4.50	80	47
D300048	4.80	86	52
D30005	5.00	86	52
D300055	5.50	93	57
D30006	6.00	93	57
D30065	6.50	101	63

Art No.	D	L1	L2
D300068	6.80	109	69
D30007	7.00	109	69
D300075	7.50	109	69
D30008	8.00	117	75
D300085	8.50	117	75
D30009	9.00	125	81
D300095	9.50	125	81
D30010	10.00	133	87
D300105	10.50	133	87
D30011	11.00	142	94
D300115	11.50	142	94
D30012	12.00	151	101
D300125	12.50	151	101
D30013	13.00	151	101

Art No.	D	L1	L2
D300135	13.50	160	108
D30014	14.00	160	108
D300145	14.50	169	114
D30015	15.00	169	114
D300155	15.50	178	120
D30016	16.00	178	120
D300165	16.50	184	125
D30017	17.00	184	125
D300175	17.50	191	130
D30018	18.00	191	130
D300185	18.50	198	135
D30019	19.00	198	135
D300195	19.50	205	140
D30020	20.00	205	140



HSS (8% Cobalt) Drill Bit

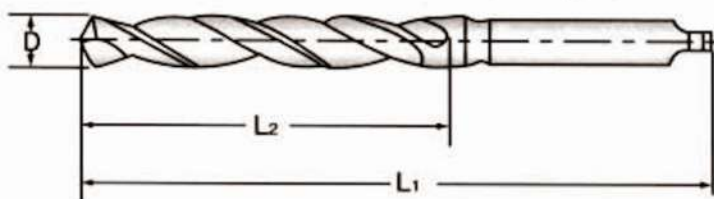

Technical Data (Taper Shank)

(All units in mm)


Art No.	Diameter	L2	L1
D22008	8	75	156
D220085	8.5	75	156
D22009	9	81	162
D220095	9.5	81	162
D22010	10	87	168
D220105	10.5	87	168
D22011	11	94	175
D220115	11.5	94	175
D22012	12	101	182
D220125	12.5	101	182
D22013	13	101	182
D220135	13.5	108	189
D22014	14	108	189
D220145	14.5	114	212
D22015	15	114	212
D220155	15.5	120	218
D22016	16	120	218
D220165	16.5	125	223
D22017	17	125	223
D220175	17.5	130	228
D22018	18	130	228
D220185	18.5	135	233
D22019	19	135	233
D220195	19.5	140	238
D22020	20	140	238
D220205	20.5	145	243
D22021	21	145	243
D220215	21.5	150	248
D22022	22	150	248
D220225	22.5	155	253
D22023	23	155	253
D220235	23.5	155	276
D22024	24	160	281
D220245	24.5	160	281
D22025	25	160	281
D220255	25.5	165	286
D22026	26	165	286

Art No.	Diameter	L2	L1
D220265	26.5	165	286
D22027	27	170	291
D220275	27.5	170	291
D22028	28	170	291
D220285	28.5	175	296
D22029	29	175	296
D220295	29.5	175	296
D22030	30	175	301
D220305	30.5	180	301
D22031	31	180	301
D220315	31.5	180	301
D22032	32	185	334
D220325	32.5	185	334
D22033	33	185	334
D220335	33.5	185	334
D22034	34	190	339
D220345	34.5	190	339
D22035	35	190	339
D220355	35.5	190	339
D22036	36	195	344
D220365	36.5	195	344
D22037	37	195	344
D22038	38	200	349
D220385	38.5	200	349
D22039	39	200	349
D220395	39.5	200	349
D22040	40	200	349
D220405	40.5	205	354
D22041	41	205	354
D220415	41.5	205	354
D22042	42	205	354
D220425	42.5	205	354
D22043	43	210	359
D220435	43.5	210	359
D220445	44.5	210	359
D22045	45	210	359
D220455	45.5	215	364

Art No.	Diameter	L2	L1
D22046	46	215	364
D220465	46.5	215	364
D22047	47	215	364
D220475	47.5	215	364
D22048	48	220	369
D220485	48.5	220	369
D22049	49	220	369
D220495	49.5	220	369
D22050	50	220	369
D220505	50.5	220	374
D22051	51	225	412
D22052	52	225	412
D22053	53	225	412
D22054	54	230	417
D22055	55	230	417
D22056	56	230	417
D22057	57	235	422
D22058	58	235	422
D22059	59	235	422
D22060	60	235	422
D22061	61	240	427
D22062	62	240	427
D22063	63	240	427
D22064	64	245	432
D22065	65	245	432
D22066	66	245	432
D22067	67	245	432
D22068	68	250	437
D22069	69	250	437
D22070	70	250	437
D22071	71	250	437
D22072	72	255	442
D22073	73	255	442
D22074	74	255	442
D22075	75	260	447



HSS (8% Cobalt) Drill Bit

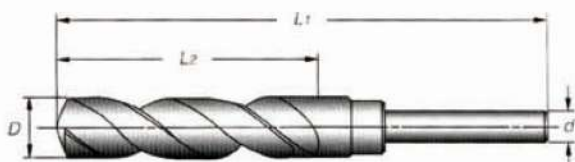

Technical Data (Reduce Shank (1/2" Parallel))

(All units in mm)

Art No.	D	L1	L2	d
D12013	13.00	152	76	12.7
D120135	13.50	152	76	12.7
D12014	14.00	152	76	12.7
D120145	14.50	152	76	12.7
D12015	15.00	152	76	12.7
D120155	15.50	152	76	12.7
D12016	16.00	152	76	12.7
D120165	16.50	152	76	12.7
D12017	17.00	152	76	12.7
D120175	17.50	152	76	12.7
D12018	18.00	152	76	12.7
D120185	18.50	152	76	12.7
D12019	19.00	152	76	12.7
D120195	19.50	152	76	12.7
D12020	20.00	152	76	12.7
D120205	20.50	152	76	12.7
D12021	21.00	152	76	12.7
D120215	21.50	152	76	12.7

Art No.	D	L1	L2	d
D12022	22.00	152	76	12.7
D120225	22.50	152	76	12.7
D12023	23.00	152	76	12.7
D120235	23.50	152	76	12.7
D12024	24.00	152	76	12.7
D120245	24.50	152	76	12.7
D12025	25.00	152	76	12.7
D120255	25.50	152	76	12.7
D12026	26.00	152	76	12.7
D120265	26.50	152	76	12.7
D12027	27.00	152	76	12.7
D120275	27.50	152	76	12.7
D12028	28.00	152	76	12.7
D120285	28.50	152	76	12.7
D12029	29.00	152	76	12.7
D120295	29.50	152	76	12.7
D12030	30.00	152	76	12.7